

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	15787.7 cd per klm.
(Luminaire orientation as tested.)	4.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	25.0V x 18.9H
	At 50% of Imax	12.4V x 9.8H
	At 90% of Imax	4.6V x 3.6H

Beam Flux	Total	1001.4 lumens per klm.
	To 10% of Imax	719.3 lumens per klm.
	To 50% of Imax	358.5 lumens per klm.
	To 90% of Imax	69.4 lumens per klm.

Upward LOR	2.1 %
Downward LOR	98.1 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 30DEG
Operators: Simon
Test Date: 2019-08-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.510m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.72V I:0.1045A P:22.287W PF:0.9667 Freq:50.01Hz Lamp Flux:590.151x1 lm		
NAME: ProPoint Sconce L Green 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

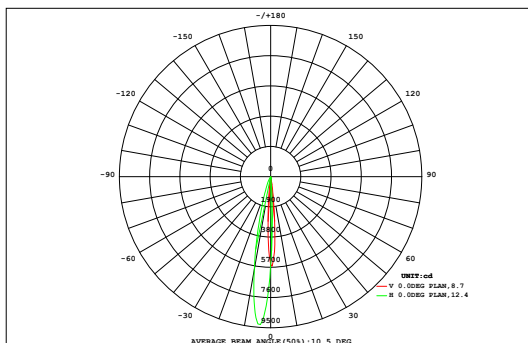

DATA OF LAMP		Eff:26.48lm/W	
MODEL	XPE2	Imax(cd)	9317
NOMINAL POWER(W)	24	AVAILABILITY(%)	71.5
RATED VOLTAGE(V)	AC 220	Avai. FLUX(lm)	421.7
NOMINAL FLUX(lm)	590.151	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	590.2
TEST VOLTAGE(V)	AC 220	θ @50% (H,V)	10,12DEG

	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.29	0.43	0.63	0.89	1.22	1.60	1.86	2.04	2.15	2.08	1.86	1.60	1.31	0.96	0.67	0.45	0.30	0.19	20.5	15.4
18	0.32	0.48	0.73	1.09	1.57	2.18	2.67	2.95	3.13	3.02	2.65	2.22	1.70	1.17	0.76	0.48	0.30	0.21	27.6	23.3
16	0.33	0.53	0.83	1.31	1.99	2.82	3.69	4.18	4.48	4.30	3.68	2.98	2.12	1.37	0.82	0.48	0.31	0.21	36.4	32.9
14	0.31	0.53	0.91	1.52	2.40	3.53	4.85	5.71	6.18	5.90	4.91	3.77	2.49	1.49	0.82	0.50	0.31	0.19	46.3	42.7
12	0.25	0.48	0.90	1.62	2.71	4.14	5.88	7.40	8.06	7.63	6.20	4.40	2.71	1.49	0.84	0.47	0.27	0.15	55.6	52.2
10	0.17	0.34	0.75	1.50	2.72	4.48	6.64	8.85	9.85	9.24	7.23	4.72	2.66	1.45	0.75	0.37	0.18	0.10	62.0	59.3
8	0.16	0.27	0.52	1.11	2.31	4.27	6.91	9.56	11.0	10.2	7.65	4.60	2.43	1.14	0.49	0.23	0.14	0.09	63.1	60.3
6	0.14	0.24	0.44	0.87	1.75	3.43	6.13	9.04	10.7	9.90	7.07	3.92	1.75	0.73	0.36	0.20	0.12	0.09	56.8	53.7
4	0.11	0.18	0.30	0.59	1.22	2.49	4.61	6.99	8.40	7.86	5.28	2.74	1.17	0.51	0.26	0.15	0.10	0.08	43.1	40.1
2	0.09	0.13	0.19	0.35	0.70	1.48	2.87	4.52	5.42	4.72	3.10	1.55	0.64	0.30	0.18	0.12	0.09	0.07	26.5	23.1
0	0.09	0.11	0.15	0.22	0.38	0.74	1.37	2.16	2.60	2.29	1.43	0.75	0.34	0.20	0.14	0.10	0.08	0.07	13.2	9.39
-2	0.08	0.10	0.12	0.15	0.21	0.34	0.51	0.81	0.92	0.84	0.56	0.31	0.21	0.15	0.11	0.09	0.08	0.07	5.64	0.58
-4	0.08	0.09	0.11	0.13	0.15	0.18	0.24	0.29	0.34	0.31	0.24	0.19	0.15	0.13	0.11	0.09	0.08	0.07	2.97	0.00
-6	0.08	0.09	0.11	0.12	0.13	0.15	0.17	0.18	0.19	0.18	0.17	0.15	0.13	0.12	0.11	0.10	0.09	0.08	2.35	0.00
-8	0.10	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.16	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.10	0.09	2.29	0.00
-10	0.11	0.12	0.12	0.13	0.14	0.15	0.15	0.16	0.16	0.16	0.15	0.15	0.14	0.13	0.12	0.12	0.11	0.10	2.40	0.00
-12	0.12	0.13	0.13	0.14	0.15	0.15	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.14	0.13	0.13	0.12	0.11	2.57	0.00
-14	0.14	0.14	0.14	0.15	0.15	0.16	0.16	0.17	0.17	0.17	0.17	0.16	0.16	0.15	0.15	0.14	0.13	0.12	2.74	0.00
-16	0.14	0.14	0.14	0.15	0.15	0.16	0.16	0.17	0.17	0.17	0.17	0.16	0.16	0.15	0.15	0.14	0.13	0.12	2.74	0.00
-18	0.14	0.14	0.14	0.15	0.15	0.16	0.16	0.17	0.17	0.17	0.17	0.16	0.16	0.15	0.15	0.14	0.13	0.12	2.74	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)	4	6	8	10	12	14	16	18			
Φ t	2.96	4.50	7.21	12.0	20.0	32.4	49.0	65.3	74.0	69.2	52.7	34.5	20.4	11.7	6.93	4.33	2.90	2.07	472	---
Φ a	0.00	0.00	0.00	7.20	17.4	30.2	47.2	63.4	72.5	67.2	50.8	32.2	17.9	7.12	0.00	0.00	0.00	0.00	---	413

one-half-peak spread: U:4.8,D:7.7 , L:5.7,R:4.2


NEMA Beam Type: Type 2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.72V I:0.1045A P:22.287W PF:0.9667 Freq:50.01Hz Lamp Flux:590.151x1 lm		
NAME: ProPoint Sconce L Green 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

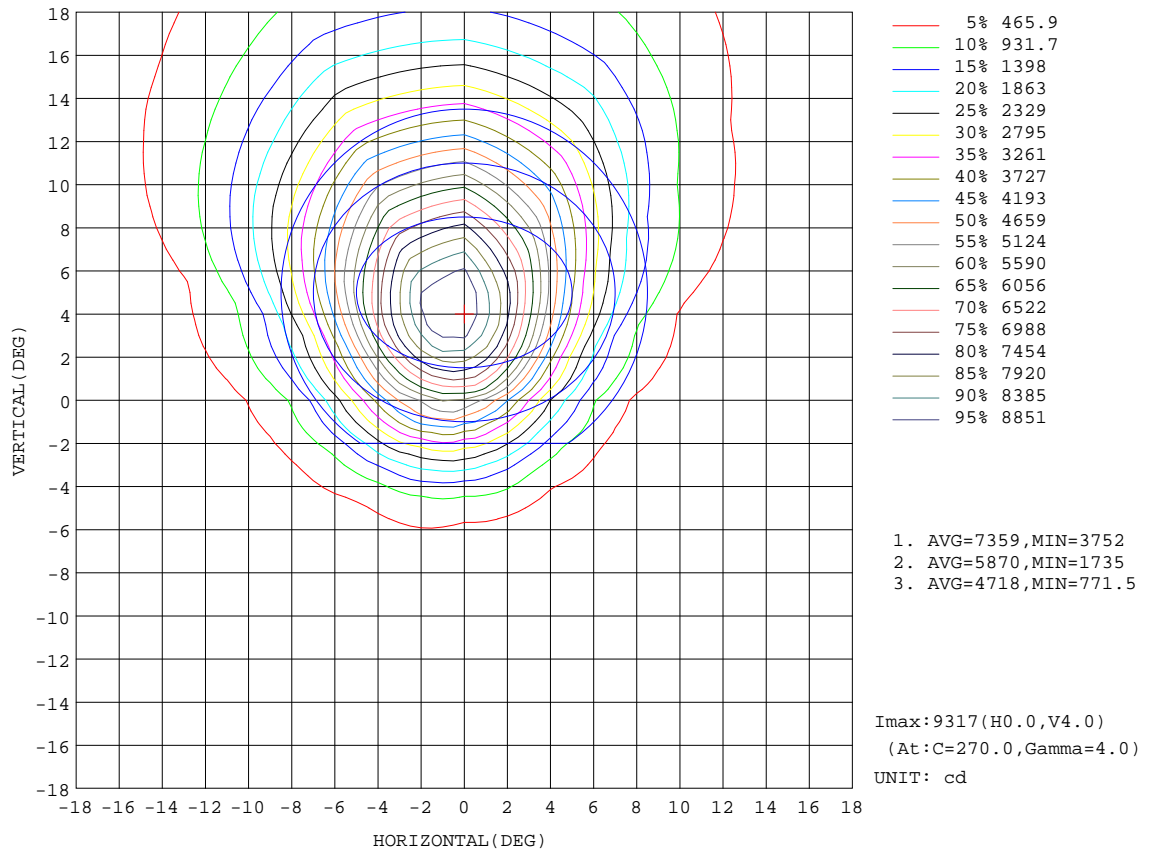


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:30DEG
Operators:Simon
Test Date:2019-08-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.510m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.72V I:0.1045A P:22.287W PF:0.9667 Freq:50.01Hz Lamp Flux:590.151x1 lm		
NAME: ProPoint Sconce L Green 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

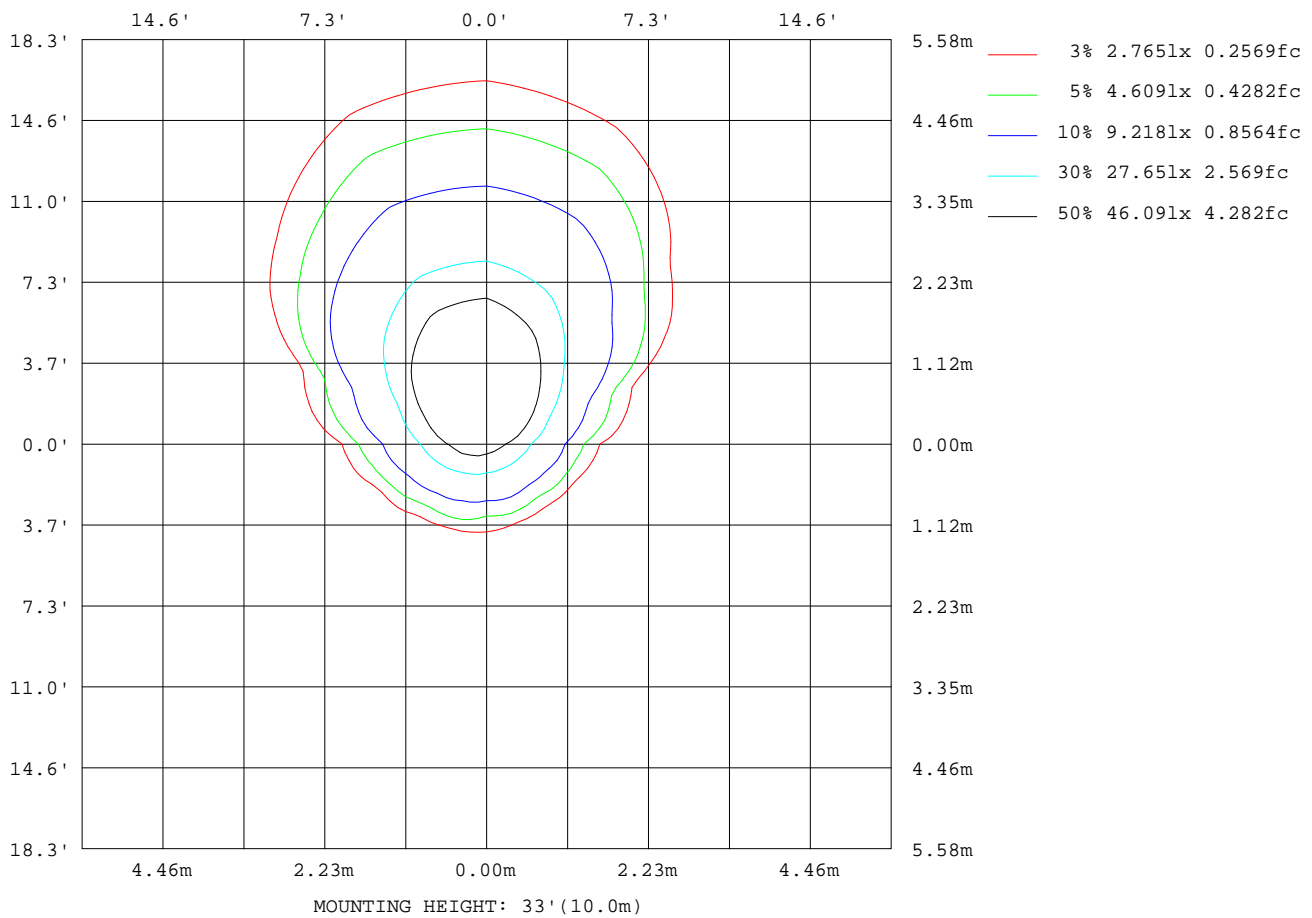

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:30DEG
Operators:Simon
Test Date:2019-08-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.510m [K=1.0000]
Remarks:

Planar Illuminance Curve

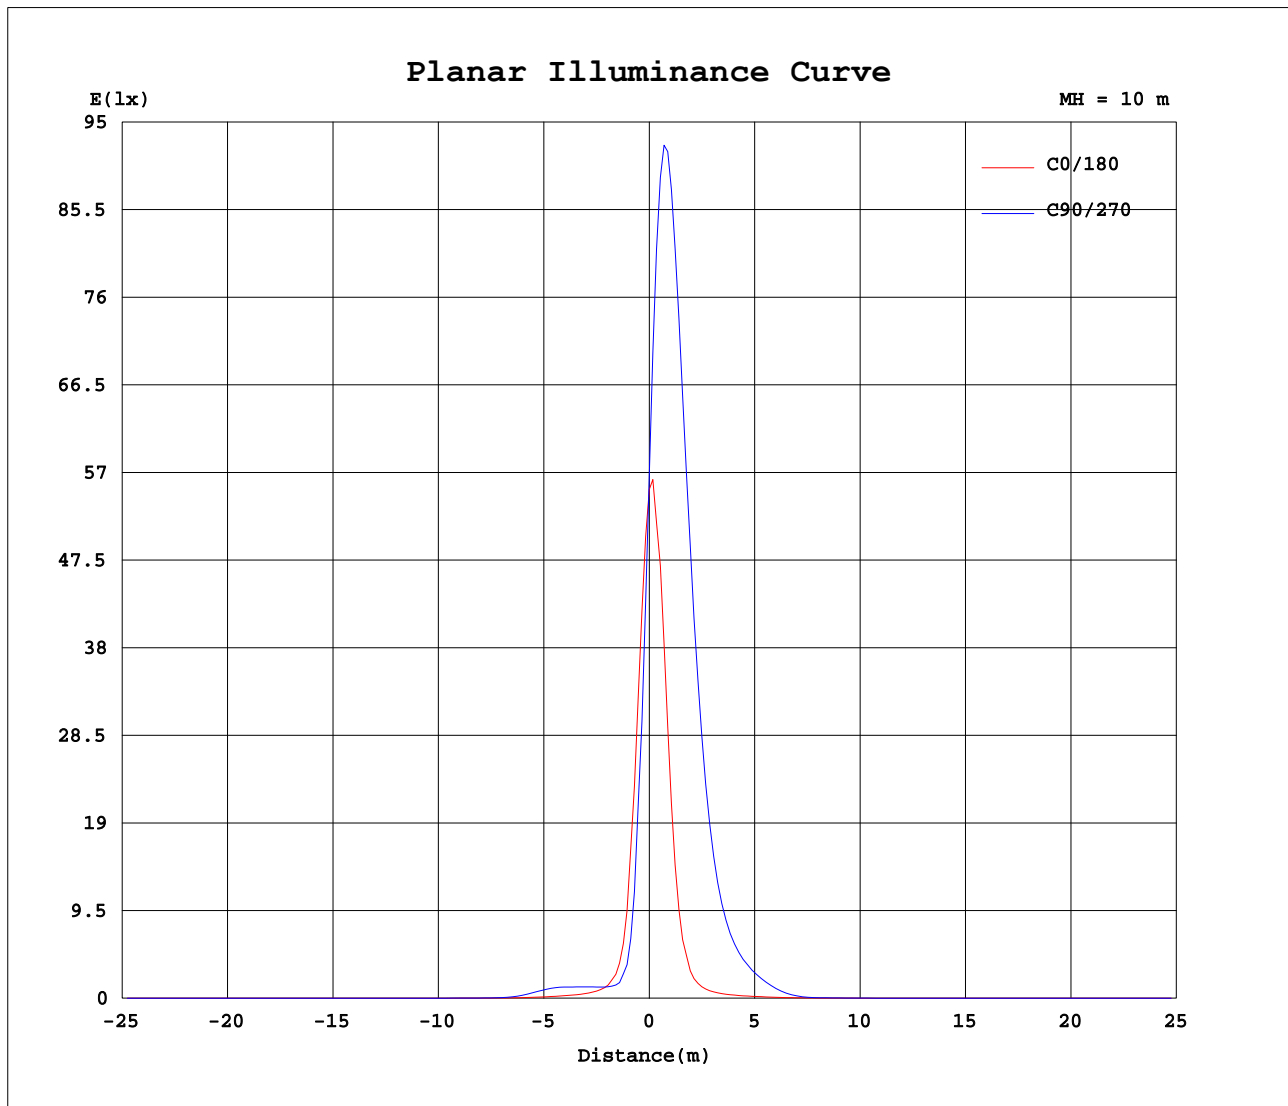


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 30DEG
Operators: Simon
Test Date: 2019-08-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.510m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.72V I:0.1045A P:22.287W PF:0.9667 Freq:50.01Hz Lamp Flux:590.151x1 lm		
NAME: ProPoint Sconce L Green 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

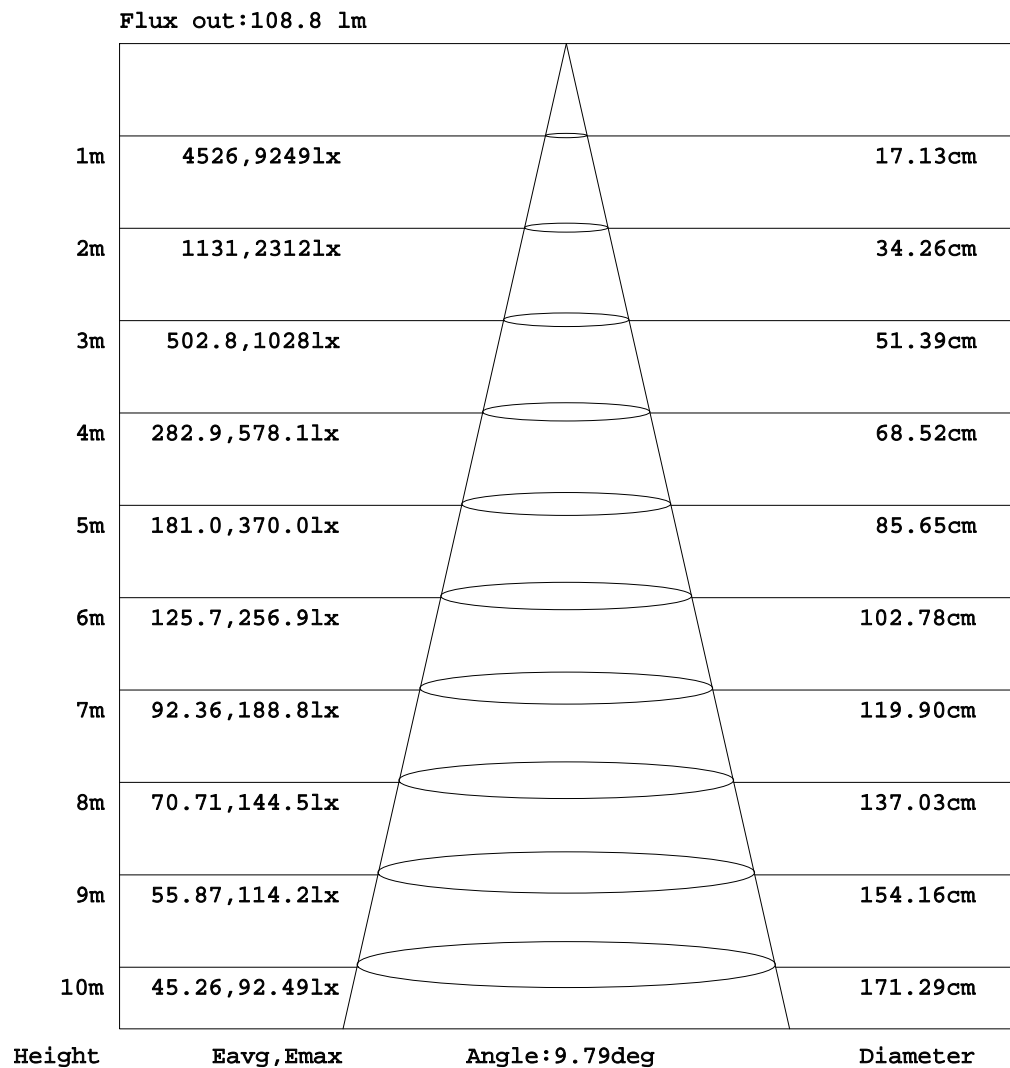

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.72V I:0.1045A P:22.287W PF:0.9667 Freq:50.01Hz Lamp Flux:590.151x1 lm		
NAME: ProPoint Sconce L Green 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.24	0.67	0.18	0.04	0.04	0.05	0.08	0.15	0.32	0.73	1.97	3.83	4.94	5.38	5.62	5.82	5.92	5.45	4.44
-170	1.24	0.70	0.28	0.15	0.14	0.19	0.29	0.48	0.85	1.38	2.70	5.01	6.31	5.91	5.85	5.85	5.84	5.45	5.05
-160	1.24	0.75	0.39	0.27	0.25	0.31	0.45	0.69	1.18	1.79	2.69	4.55	6.64	7.07	6.30	6.00	5.92	5.86	5.91
-150	1.24	0.82	0.52	0.41	0.38	0.42	0.56	0.80	1.19	1.73	2.26	3.10	4.69	6.52	7.63	7.79	7.44	7.14	7.07
-140	1.24	0.89	0.65	0.58	0.56	0.53	0.64	0.78	0.95	1.23	1.70	2.20	2.78	3.65	4.81	6.05	6.88	7.45	7.80
-130	1.24	0.97	0.79	0.77	0.79	0.78	0.71	0.69	0.73	0.86	1.05	1.33	1.74	2.18	2.62	2.95	3.17	3.34	3.44
-120	1.24	1.06	0.93	0.94	1.04	1.12	0.97	0.80	0.70	0.68	0.69	0.79	0.94	1.12	1.30	1.42	1.53	1.60	1.64
-110	1.24	1.14	1.08	1.09	1.20	1.31	1.25	1.15	1.03	0.93	0.81	0.73	0.70	0.68	0.68	0.68	0.66	0.64	0.62
-100	1.24	1.21	1.21	1.25	1.32	1.36	1.35	1.34	1.33	1.31	1.25	1.18	1.11	1.04	0.98	0.96	0.94	0.92	0.92
-90	1.24	1.28	1.33	1.37	1.42	1.44	1.44	1.44	1.44	1.44	1.41	1.38	1.35	1.32	1.31	1.32	1.33	1.34	1.35
-80	1.24	1.35	1.44	1.51	1.58	1.63	1.67	1.72	1.77	1.82	1.83	1.84	1.85	1.85	1.87	1.90	1.93	1.95	1.97
-70	1.24	1.41	1.52	1.61	1.74	1.87	1.97	2.05	2.13	2.17	2.18	2.21	2.23	2.25	2.28	2.30	2.32	2.34	2.36
-60	1.24	1.45	1.56	1.68	1.81	2.01	2.06	2.09	2.13	2.17	2.24	2.29	2.34	2.39	2.40	2.46	2.49	2.51	2.52
-50	1.24	1.48	1.59	1.66	1.78	1.93	2.06	2.16	2.33	2.49	2.62	2.75	2.86	2.97	3.07	3.16	3.22	3.25	3.23
-40	1.24	1.49	1.59	1.59	1.69	1.89	2.16	2.48	2.72	2.93	3.15	3.40	3.73	4.12	4.59	5.15	5.65	5.96	5.82
-30	1.24	1.50	1.53	1.50	1.64	1.93	2.33	2.73	3.10	3.40	3.85	4.57	6.17	11.3	22.6	41.5	62.8	73.2	70.2
-20	1.24	1.50	1.46	1.40	1.61	2.00	2.45	2.86	3.30	3.89	4.87	7.49	20.1	60.5	113	133	139	144	148
-10	1.24	1.50	1.40	1.31	1.60	2.01	2.47	2.93	3.45	4.31	6.05	12.5	32.7	53.5	66.7	83.8	103	129	138
0	1.24	1.49	1.35	1.21	1.55	1.96	2.41	2.88	3.48	4.47	6.38	11.2	20.8	33.2	54.0	112	486	2979	5518
10	1.24	1.48	1.33	1.20	1.52	1.95	2.42	2.95	3.65	4.83	6.92	10.9	18.4	32.2	101	435	1699	4442	5953
20	1.24	1.47	1.33	1.18	1.43	1.87	2.34	2.85	3.53	4.57	6.31	9.28	17.6	47.6	125	301	615	913	1021
30	1.24	1.47	1.35	1.16	1.32	1.71	2.13	2.59	3.14	3.75	4.67	6.23	9.05	15.1	33.5	80.8	148	193	214
40	1.24	1.46	1.38	1.16	1.18	1.47	1.84	2.20	2.54	2.89	3.28	3.79	4.63	5.74	7.09	8.63	10.1	11.3	11.6
50	1.24	1.45	1.40	1.19	1.09	1.20	1.47	1.74	1.99	2.22	2.42	2.66	2.95	3.28	3.60	3.89	4.12	4.28	4.34
60	1.24	1.42	1.42	1.29	1.09	1.03	1.09	1.24	1.41	1.58	1.73	1.93	2.08	2.24	2.39	2.47	2.53	2.56	2.57
70	1.24	1.38	1.43	1.37	1.25	1.08	0.98	0.93	0.90	0.94	1.04	1.15	1.27	1.37	1.44	1.48	1.50	1.50	1.49
80	1.24	1.34	1.39	1.41	1.38	1.32	1.26	1.18	1.08	0.99	0.90	0.84	0.81	0.78	0.77	0.76	0.76	0.75	0.75
90	1.24	1.28	1.32	1.36	1.40	1.40	1.38	1.35	1.33	1.30	1.28	1.26	1.24	1.22	1.21	1.22	1.23	1.24	1.25
100	1.24	1.20	1.19	1.17	1.16	1.12	1.05	1.00	0.96	0.93	0.91	0.89	0.90	0.91	0.90	0.87	0.85	0.83	0.83
110	1.24	1.13	1.00	0.88	0.76	0.65	0.53	0.44	0.36	0.29	0.25	0.24	0.25	0.25	0.25	0.22	0.20	0.19	0.18
120	1.24	1.04	0.80	0.60	0.42	0.30	0.21	0.14	0.09	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.16	0.18	0.20
130	1.24	0.94	0.63	0.37	0.22	0.14	0.09	0.06	0.06	0.07	0.10	0.14	0.14	0.17	0.19	0.22	0.25	0.29	0.32
140	1.24	0.86	0.48	0.22	0.12	0.08	0.05	0.04	0.06	0.10	0.15	0.22	0.29	0.34	0.40	0.47	0.59	0.71	0.77
150	1.24	0.79	0.36	0.13	0.07	0.05	0.04	0.04	0.08	0.13	0.24	0.40	0.68	1.22	1.96	2.56	2.98	3.28	3.36
160	1.24	0.73	0.28	0.09	0.06	0.05	0.06	0.08	0.13	0.24	0.46	1.22	2.51	3.64	4.37	4.76	4.92	5.03	5.07
170	1.24	0.69	0.22	0.06	0.05	0.05	0.07	0.12	0.24	0.50	1.26	2.84	4.19	4.90	5.28	5.54	5.76	5.79	5.85
180	1.24	0.67	0.18	0.04	0.04	0.05	0.08	0.15	0.32	0.73	1.97	3.83	4.94	5.38	5.62	5.82	5.92	5.45	4.37

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:30DEG
Operators:Simon
Test Date:2019-08-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.510m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.72V I:0.1045A P:22.287W PF:0.9667 Freq:50.01Hz Lamp Flux:590.151x1 lm																	
NAME: ProPoint Sconce L Green 10Dx5D									TYPE:Sconce						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:1		
MFR.: Traxon Technologies									SUR.:						Shielding Angle:		

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.84	5.77	5.77	5.44	4.82	5.16	4.94	3.09	1.81	1.40	0.87	0.48	0.38	0.45	0.85	1.26	1.42	1.45	
-170	5.15	5.69	5.86	5.80	5.35	5.71	5.25	3.28	1.97	1.50	0.92	0.53	0.40	0.45	0.84	1.25	1.42	1.45	
-160	5.89	5.98	6.01	6.03	6.43	6.32	4.61	2.74	1.90	1.43	0.84	0.52	0.40	0.48	0.88	1.26	1.41	1.45	
-150	7.12	7.41	7.72	7.60	6.66	4.94	3.25	2.25	1.72	1.13	0.71	0.48	0.39	0.53	0.94	1.28	1.41	1.45	
-140	7.53	7.04	6.27	5.03	3.82	2.88	2.26	1.74	1.21	0.81	0.56	0.41	0.41	0.66	1.04	1.31	1.41	1.45	
-130	3.35	3.20	2.99	2.68	2.26	1.82	1.37	1.00	0.74	0.53	0.41	0.38	0.53	0.86	1.16	1.33	1.42	1.45	
-120	1.61	1.55	1.45	1.33	1.10	0.90	0.69	0.52	0.44	0.43	0.46	0.60	0.81	1.08	1.25	1.36	1.42	1.45	
-110	0.62	0.62	0.60	0.58	0.55	0.52	0.52	0.55	0.63	0.73	0.85	1.00	1.12	1.23	1.32	1.38	1.42	1.45	
-100	0.89	0.87	0.86	0.85	0.88	0.94	1.00	1.07	1.14	1.18	1.22	1.25	1.28	1.32	1.36	1.39	1.43	1.45	
-90	1.33	1.32	1.30	1.29	1.30	1.32	1.34	1.36	1.39	1.38	1.37	1.36	1.36	1.36	1.38	1.41	1.43	1.45	
-80	1.94	1.91	1.87	1.83	1.81	1.78	1.76	1.74	1.72	1.65	1.60	1.55	1.49	1.46	1.45	1.44	1.44	1.45	
-70	2.32	2.27	2.23	2.18	2.13	2.08	2.02	1.98	1.93	1.87	1.81	1.73	1.65	1.57	1.52	1.48	1.46	1.45	
-60	2.46	2.39	2.31	2.22	2.15	2.10	2.03	1.97	1.87	1.79	1.74	1.73	1.67	1.63	1.57	1.52	1.47	1.45	
-50	3.08	2.91	2.72	2.55	2.43	2.31	2.21	2.09	1.93	1.76	1.64	1.59	1.61	1.60	1.58	1.53	1.49	1.45	
-40	5.30	4.57	3.88	3.37	2.95	2.63	2.41	2.22	2.04	1.86	1.64	1.55	1.53	1.55	1.54	1.54	1.51	1.45	
-30	58.0	36.9	19.2	9.84	5.12	3.62	2.91	2.48	2.19	1.94	1.83	1.68	1.55	1.49	1.50	1.54	1.51	1.45	
-20	143	136	113	68.2	22.5	7.32	4.04	2.99	2.58	2.33	2.12	1.88	1.63	1.47	1.47	1.52	1.51	1.45	
-10	120	94.3	76.9	59.3	35.6	13.7	6.15	4.21	3.29	2.77	2.41	2.08	1.74	1.48	1.43	1.50	1.52	1.45	
0	1644	212	75.1	42.4	26.2	14.2	7.63	5.21	3.92	3.16	2.66	2.22	1.82	1.48	1.39	1.48	1.52	1.45	
10	3387	893	245	67.9	24.6	14.1	8.68	5.91	4.31	3.35	2.72	2.23	1.80	1.45	1.36	1.46	1.51	1.45	
20	821	508	225	78.9	29.5	12.9	7.92	5.62	4.18	3.25	2.63	2.13	1.71	1.39	1.32	1.45	1.51	1.45	
30	175	117	57.9	23.2	11.8	7.87	5.58	4.27	3.47	2.89	2.36	1.92	1.56	1.30	1.28	1.45	1.51	1.45	
40	10.9	9.59	8.06	6.58	5.29	4.24	3.49	3.05	2.69	2.34	1.98	1.65	1.35	1.22	1.28	1.46	1.50	1.45	
50	4.24	4.06	3.82	3.51	3.17	2.84	2.54	2.30	2.07	1.81	1.56	1.31	1.14	1.16	1.33	1.47	1.49	1.45	
60	2.56	2.52	2.45	2.36	2.20	2.02	1.83	1.63	1.47	1.28	1.12	1.04	1.06	1.24	1.41	1.49	1.48	1.45	
70	1.49	1.48	1.45	1.40	1.31	1.20	1.08	0.96	0.90	0.93	0.98	1.10	1.26	1.40	1.47	1.48	1.47	1.45	
80	0.76	0.76	0.77	0.78	0.81	0.86	0.93	1.02	1.13	1.23	1.32	1.39	1.45	1.46	1.46	1.46	1.45	1.45	
90	1.25	1.25	1.25	1.25	1.26	1.28	1.29	1.31	1.32	1.34	1.35	1.37	1.38	1.40	1.41	1.42	1.43	1.45	
100	0.83	0.84	0.86	0.89	0.90	0.88	0.87	0.87	0.87	0.91	0.94	0.97	1.03	1.16	1.28	1.37	1.43	1.45	
110	0.19	0.20	0.22	0.24	0.25	0.24	0.23	0.22	0.25	0.30	0.36	0.45	0.55	0.82	1.10	1.30	1.41	1.45	
120	0.18	0.17	0.15	0.15	0.15	0.14	0.13	0.12	0.10	0.10	0.11	0.16	0.26	0.59	0.94	1.23	1.40	1.45	
130	0.30	0.27	0.23	0.21	0.20	0.20	0.18	0.15	0.11	0.08	0.07	0.07	0.19	0.48	0.84	1.17	1.39	1.45	
140	0.75	0.66	0.52	0.46	0.39	0.34	0.28	0.20	0.13	0.09	0.06	0.09	0.18	0.42	0.79	1.15	1.38	1.45	
150	3.36	3.16	2.84	2.34	1.62	0.97	0.56	0.33	0.20	0.10	0.12	0.15	0.20	0.38	0.76	1.15	1.38	1.45	
160	4.99	4.88	4.76	4.51	4.00	3.11	1.85	0.80	0.51	0.45	0.30	0.23	0.25	0.38	0.76	1.16	1.39	1.45	
170	5.66	5.60	5.42	5.21	4.93	4.62	3.71	2.09	1.18	0.93	0.59	0.36	0.31	0.40	0.79	1.20	1.40	1.45	
180	4.84	5.77	5.77	5.44	4.82	5.16	4.94	3.09	1.81	1.40	0.87	0.48	0.38	0.45	0.85	1.26	1.42	1.45	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks: