

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	15602.2 cd per klm.
(Luminaire orientation as tested.)	5.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	26.2V x 19.2H
	At 50% of Imax	13.0V x 9.6H
	At 90% of Imax	4.9V x 3.3H

Beam Flux	Total	1001.2 lumens per klm.
	To 10% of Imax	735.8 lumens per klm.
	To 50% of Imax	352.7 lumens per klm.
	To 90% of Imax	49.4 lumens per klm.

Upward LOR	1.9 %
Downward LOR	98.2 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 30DEG
Operators: Simon
Test Date: 2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.510m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.71V I:0.0637A P:13.148W PF:0.9358 Freq:50.01Hz Lamp Flux:463.122x1 lm		
NAME: ProPoint Sconce M 3000K 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

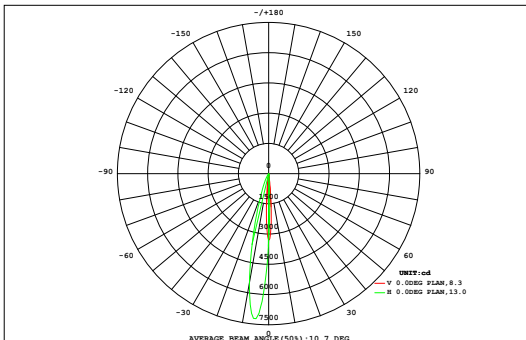

DATA OF LAMP		Eff:35.22lm/W	
MODEL	XPE2	Imax(cd)	7226
NOMINAL POWER(W)	15	AVAILABILITY(%)	73.0
RATED VOLTAGE(V)	AC 220	Avai. FLUX(lm)	337.9
NOMINAL FLUX(lm)	463.122	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	463.1
TEST VOLTAGE(V)	AC 220	θ @50% (H,V)	10,13DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.13	0.21	0.35	0.54	0.80	1.13	1.49	1.86	2.19	2.29	2.14	1.93	1.66	1.27	0.92	0.65	0.44	0.29	20.3	16.9
18	0.15	0.22	0.37	0.62	0.98	1.48	2.04	2.59	3.10	3.23	2.97	2.64	2.14	1.55	1.08	0.73	0.48	0.32	26.7	23.6
16	0.15	0.23	0.36	0.66	1.15	1.86	2.71	3.51	4.24	4.40	3.97	3.43	2.59	1.81	1.21	0.78	0.51	0.32	33.9	31.1
14	0.15	0.23	0.38	0.64	1.23	2.16	3.36	4.52	5.53	5.71	5.05	4.16	2.96	1.96	1.24	0.79	0.49	0.29	40.9	38.3
12	0.12	0.21	0.37	0.65	1.17	2.29	3.88	5.56	6.82	6.97	6.05	4.61	3.10	1.95	1.21	0.72	0.40	0.22	46.3	43.6
10	0.09	0.15	0.30	0.59	1.15	2.19	4.11	6.34	7.85	7.95	6.68	4.68	2.95	1.78	1.01	0.53	0.25	0.12	48.7	46.5
8	0.08	0.12	0.19	0.39	0.91	2.03	3.95	6.46	8.18	8.21	6.60	4.32	2.54	1.34	0.63	0.30	0.17	0.11	46.5	44.4
6	0.08	0.11	0.16	0.28	0.57	1.46	3.30	5.60	7.27	7.30	5.65	3.45	1.75	0.84	0.44	0.24	0.15	0.10	38.7	36.3
4	0.07	0.09	0.13	0.20	0.40	1.01	2.23	3.90	5.13	5.26	3.86	2.19	1.07	0.52	0.27	0.16	0.11	0.08	26.7	24.3
2	0.06	0.08	0.10	0.14	0.23	0.55	1.21	2.20	2.95	2.70	1.93	1.08	0.52	0.26	0.15	0.11	0.08	0.07	14.4	11.7
0	0.07	0.08	0.09	0.11	0.16	0.26	0.54	0.88	1.21	1.15	0.79	0.49	0.26	0.17	0.12	0.10	0.08	0.07	6.61	2.97
-2	0.07	0.08	0.09	0.10	0.12	0.16	0.23	0.33	0.42	0.41	0.31	0.22	0.16	0.13	0.10	0.09	0.08	0.07	3.16	0.00
-4	0.07	0.08	0.09	0.10	0.11	0.12	0.15	0.18	0.20	0.20	0.17	0.15	0.13	0.11	0.10	0.09	0.08	0.07	2.19	0.00
-6	0.08	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.14	0.14	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.08	1.96	0.00
-8	0.08	0.09	0.09	0.10	0.11	0.11	0.12	0.13	0.13	0.13	0.13	0.12	0.11	0.11	0.10	0.10	0.09	0.08	1.93	0.00
-10	0.09	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.10	0.09	0.09	1.95	0.00
-12	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.10	0.10	0.09	1.98	0.00
-14	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.10	0.10	0.09	1.99	0.00
-16	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.10	0.10	0.09	1.99	0.00
-18	0.09	0.10	0.10	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.10	0.10	0.09	1.99	0.00
	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)	4	6	8	10	12	14	16	18			
Φ t	1.70	2.34	3.45	5.54	9.55	17.3	29.8	44.6	55.7	56.4	46.8	33.9	22.4	14.2	9.02	5.77	3.77	2.54	365	---
Φ a	0.00	0.00	0.00	0.00	6.27	15.4	28.1	43.1	54.5	55.0	45.2	32.3	20.6	12.2	6.49	0.66	0.00	0.00	---	320

one-half-peak spread: U:4.8,D:8.3 , L:4.7,R:5.0


NEMA Beam Type: Type 2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.71V I:0.0637A P:13.148W PF:0.9358 Freq:50.01Hz Lamp Flux:463.122x1 lm		
NAME: ProPoint Sconce M 3000K 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

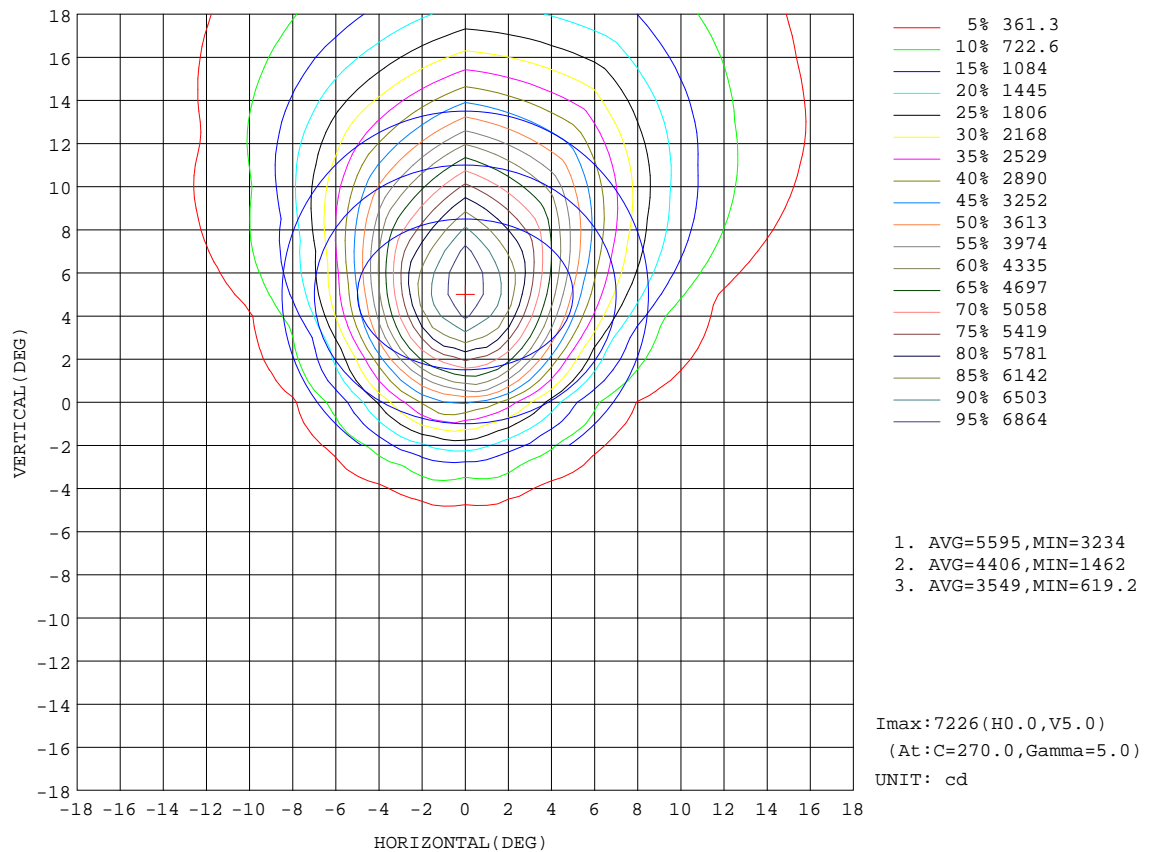


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.71V I:0.0637A P:13.148W PF:0.9358 Freq:50.01Hz Lamp Flux:463.122x1 lm		
NAME: ProPoint Sconce M 3000K 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

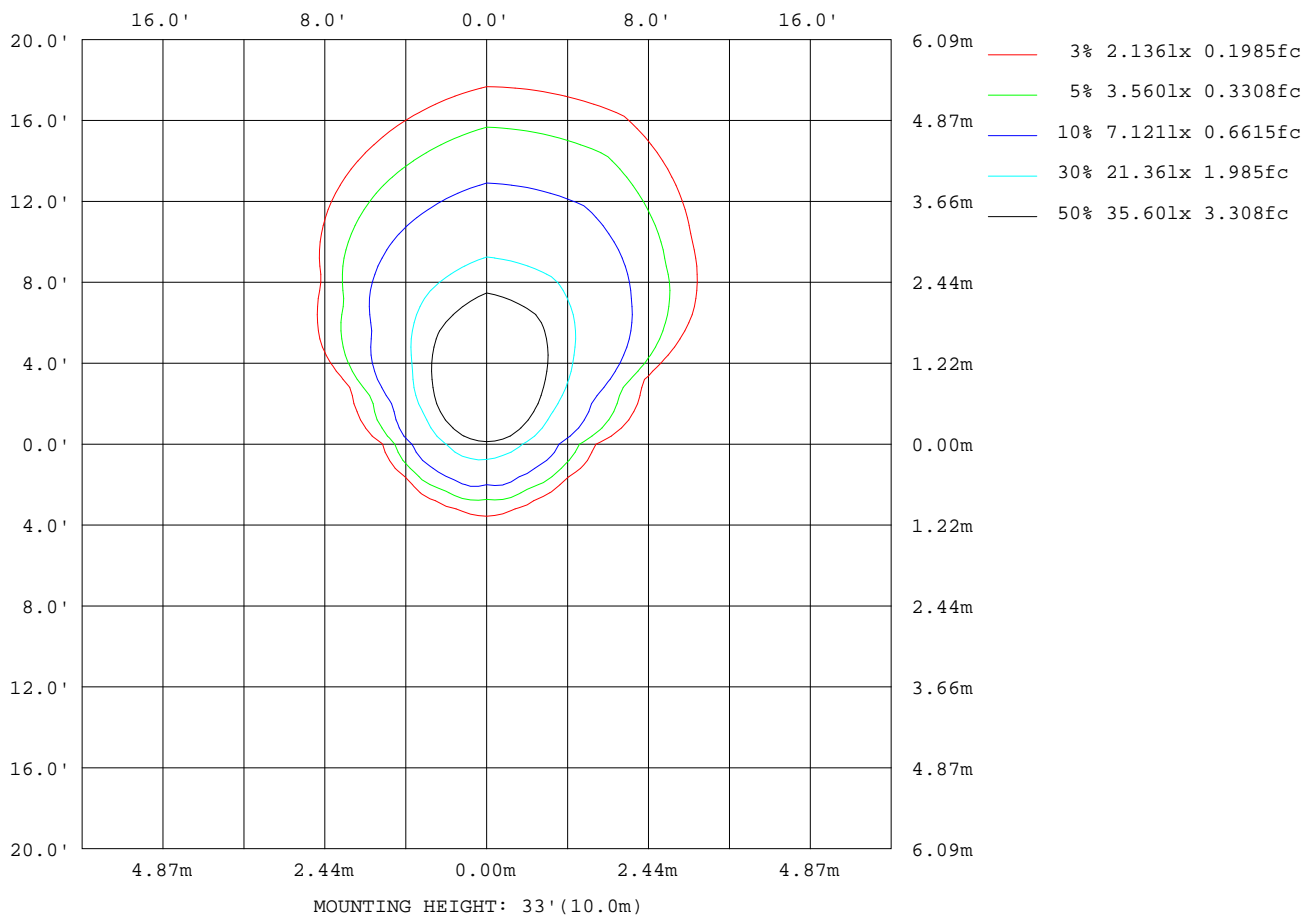

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 30DEG
 Operators: Simon
 Test Date: 2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 11.510m [K=1.0000]
 Remarks:

Planar Illuminance Curve

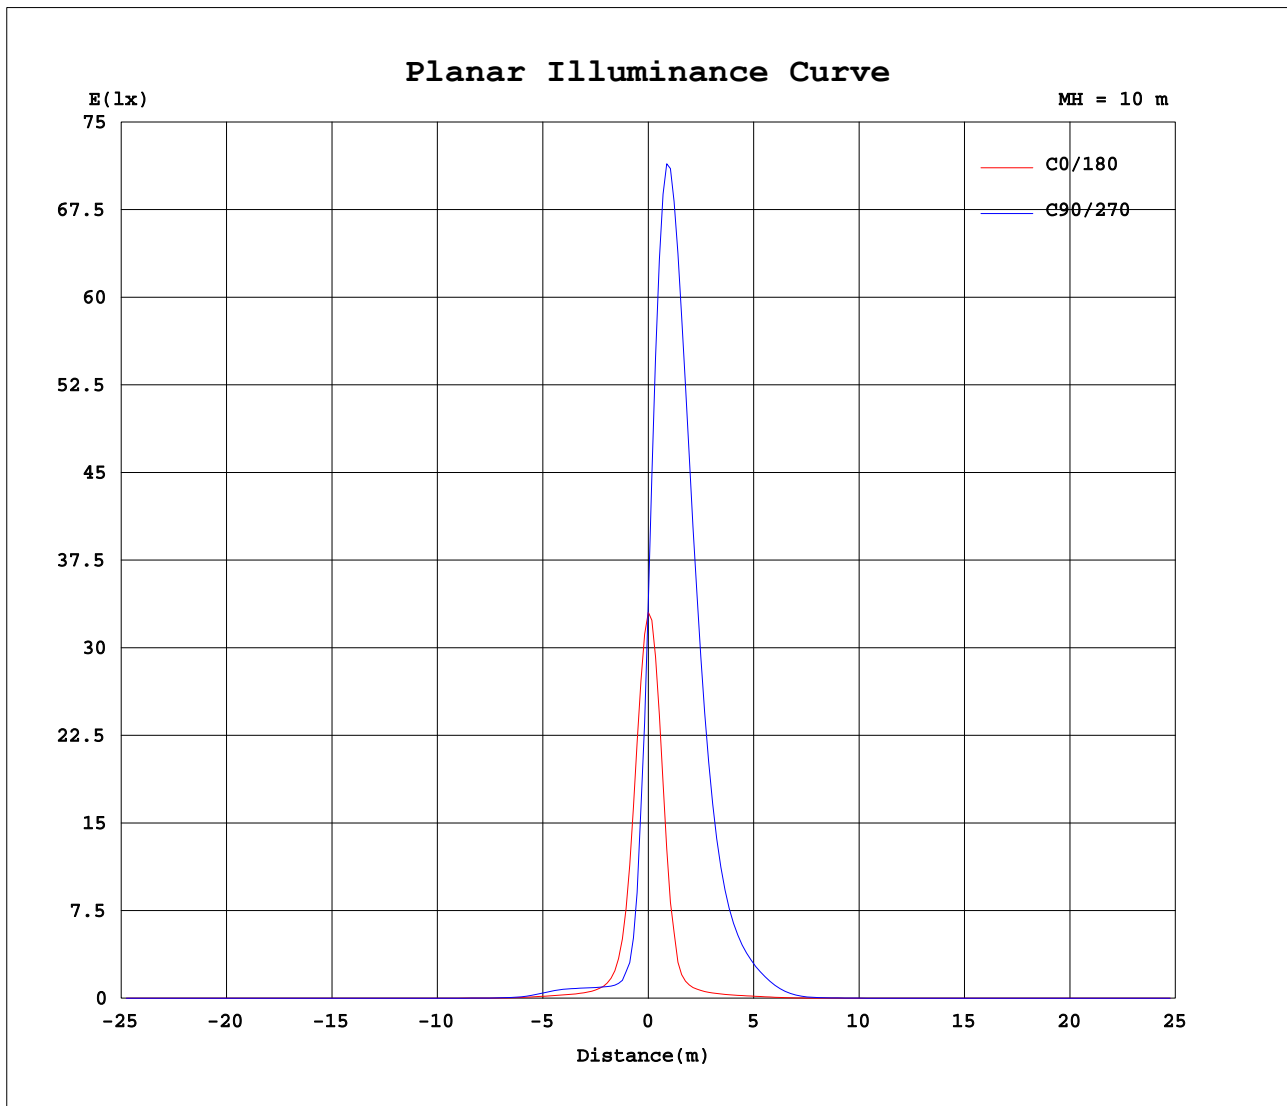


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 30DEG
Operators: Simon
Test Date: 2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.510m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.71V I:0.0637A P:13.148W PF:0.9358 Freq:50.01Hz Lamp Flux:463.122x1 lm		
NAME: ProPoint Sconce M 3000K 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

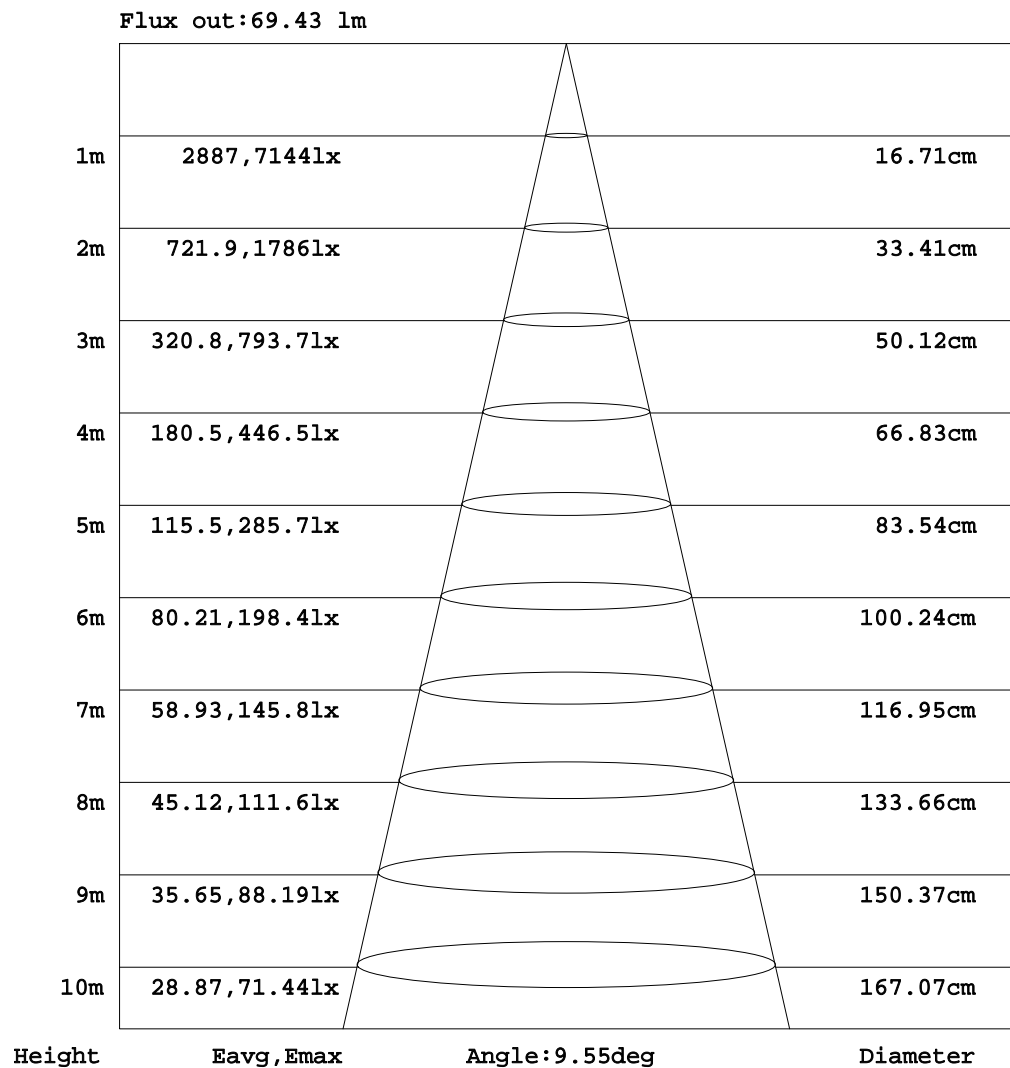

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.71V I:0.0637A P:13.148W PF:0.9358 Freq:50.01Hz Lamp Flux:463.122x1 lm		
NAME: ProPoint Sconce M 3000K 10Dx5D	TYPE:Sconce	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: Traxon Technologies	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.91	0.36	0.00	0.00	0.00	0.00	0.04	0.12	0.30	0.77	1.88	3.27	3.91	4.14	4.28	4.43	4.42	3.97	3.35
-170	0.91	0.39	0.07	0.07	0.08	0.12	0.21	0.39	0.74	1.29	2.49	4.11	4.69	4.43	4.50	4.47	4.41	3.97	3.63
-160	0.91	0.44	0.15	0.15	0.16	0.22	0.34	0.58	1.01	1.56	2.46	3.95	5.22	5.22	4.72	4.60	4.50	4.44	4.47
-150	0.91	0.49	0.24	0.24	0.23	0.30	0.43	0.64	1.01	1.51	2.03	2.90	4.19	5.40	5.99	5.93	5.57	5.33	5.28
-140	0.91	0.56	0.35	0.33	0.34	0.37	0.47	0.62	0.79	1.08	1.52	2.01	2.60	3.42	4.40	5.38	5.88	6.19	6.35
-130	0.91	0.63	0.46	0.45	0.49	0.48	0.49	0.50	0.59	0.71	0.91	1.20	1.57	1.96	2.35	2.62	2.77	2.86	2.88
-120	0.91	0.71	0.59	0.59	0.66	0.72	0.60	0.50	0.49	0.48	0.52	0.65	0.81	0.98	1.16	1.24	1.30	1.34	1.35
-110	0.91	0.79	0.72	0.73	0.81	0.89	0.83	0.74	0.66	0.58	0.52	0.49	0.47	0.47	0.49	0.49	0.48	0.47	0.45
-100	0.91	0.86	0.85	0.87	0.91	0.95	0.95	0.93	0.91	0.89	0.83	0.76	0.69	0.62	0.59	0.58	0.57	0.56	0.56
-90	0.91	0.94	0.96	0.99	1.01	1.02	1.03	1.03	1.04	1.04	1.01	0.97	0.94	0.91	0.90	0.91	0.92	0.93	0.94
-80	0.91	1.00	1.06	1.10	1.12	1.15	1.17	1.21	1.24	1.27	1.26	1.26	1.25	1.24	1.25	1.28	1.30	1.32	1.34
-70	0.91	1.06	1.13	1.18	1.24	1.32	1.40	1.46	1.51	1.53	1.53	1.53	1.53	1.54	1.54	1.54	1.54	1.54	1.54
-60	0.91	1.10	1.18	1.24	1.33	1.45	1.49	1.50	1.51	1.52	1.53	1.54	1.55	1.55	1.54	1.55	1.56	1.57	1.58
-50	0.91	1.13	1.21	1.26	1.32	1.42	1.49	1.51	1.57	1.64	1.69	1.73	1.75	1.79	1.82	1.85	1.89	1.92	1.92
-40	0.91	1.15	1.22	1.22	1.27	1.36	1.49	1.66	1.81	1.91	2.00	2.09	2.21	2.36	2.52	2.71	2.93	3.10	3.13
-30	0.91	1.16	1.21	1.15	1.20	1.34	1.57	1.83	2.07	2.22	2.42	2.71	3.17	4.13	7.02	12.4	19.5	26.3	28.5
-20	0.91	1.17	1.18	1.09	1.15	1.36	1.63	1.91	2.19	2.52	3.02	3.81	6.71	19.9	51.0	78.0	91.9	97.1	99.8
-10	0.91	1.18	1.14	1.02	1.10	1.36	1.66	1.94	2.26	2.74	3.58	5.72	17.7	42.3	60.0	71.6	85.2	100	110
0	0.91	1.18	1.11	0.96	1.05	1.32	1.62	1.91	2.26	2.85	3.94	6.98	17.0	28.9	41.1	65.1	154	1295	3305
10	0.91	1.17	1.09	0.94	1.03	1.32	1.62	1.95	2.38	3.10	4.43	6.94	12.7	22.5	56.3	191	692	3010	5495
20	0.91	1.16	1.09	0.92	0.99	1.26	1.55	1.89	2.32	2.97	4.09	5.89	9.28	18.9	48.5	166	411	772	1118
30	0.91	1.16	1.09	0.91	0.94	1.15	1.42	1.72	2.08	2.43	2.94	3.87	5.45	8.06	15.8	40.6	92.0	163	224
40	0.91	1.15	1.10	0.92	0.88	1.01	1.23	1.45	1.65	1.83	2.02	2.28	2.76	3.46	4.33	5.38	7.01	8.87	10.2
50	0.91	1.13	1.12	0.95	0.83	0.85	0.99	1.14	1.28	1.39	1.49	1.60	1.78	1.98	2.18	2.37	2.56	2.71	2.81
60	0.91	1.11	1.13	1.03	0.85	0.76	0.76	0.83	0.93	1.01	1.09	1.20	1.31	1.40	1.49	1.54	1.59	1.62	1.64
70	0.91	1.08	1.13	1.10	1.00	0.84	0.73	0.67	0.64	0.61	0.67	0.75	0.83	0.91	0.97	0.98	0.99	0.99	0.98
80	0.91	1.03	1.10	1.13	1.13	1.08	1.01	0.92	0.83	0.74	0.65	0.60	0.56	0.53	0.52	0.52	0.51	0.51	0.50
90	0.91	0.97	1.02	1.07	1.13	1.15	1.14	1.13	1.12	1.11	1.08	1.05	1.02	0.98	0.97	0.96	0.96	0.95	0.95
100	0.91	0.89	0.88	0.88	0.88	0.86	0.81	0.78	0.76	0.74	0.74	0.75	0.77	0.80	0.80	0.78	0.76	0.75	0.75
110	0.91	0.81	0.70	0.60	0.50	0.41	0.33	0.26	0.20	0.16	0.14	0.14	0.15	0.16	0.17	0.14	0.12	0.11	0.10
120	0.91	0.72	0.51	0.34	0.22	0.14	0.08	0.03	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.03	0.04	0.05	0.05
130	0.91	0.63	0.35	0.16	0.08	0.03	0.00	0.00	0.00	0.00	0.01	0.04	0.04	0.04	0.03	0.05	0.09	0.12	0.15
140	0.91	0.55	0.22	0.08	0.03	0.00	0.00	0.00	0.00	0.01	0.04	0.11	0.14	0.17	0.19	0.21	0.30	0.37	0.40
150	0.91	0.48	0.13	0.04	0.01	0.00	0.00	0.00	0.00	0.04	0.13	0.26	0.48	0.86	1.38	1.79	2.06	2.25	2.25
160	0.91	0.42	0.07	0.02	0.00	0.00	0.01	0.03	0.06	0.16	0.37	1.01	2.02	2.85	3.37	3.63	3.73	3.78	3.79
170	0.91	0.38	0.03	0.01	0.00	0.00	0.02	0.07	0.19	0.46	1.17	2.41	3.36	3.81	4.03	4.20	4.38	4.40	4.45
180	0.91	0.36	0.00	0.00	0.00	0.00	0.04	0.12	0.30	0.77	1.88	3.27	3.91	4.14	4.28	4.43	4.42	3.97	3.34

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.71V I:0.0637A P:13.148W PF:0.9358 Freq:50.01Hz Lamp Flux:463.122x1 lm																		
NAME: ProPoint Sconce M 3000K 10Dx5D									TYPE:Sconce					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:1				
MFR.: Traxon Technologies									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.89	4.38	4.25	3.82	3.18	3.31	3.00	1.83	1.07	0.80	0.42	0.24	0.24	0.36	0.69	0.96	0.96	0.94	
-170	3.83	4.37	4.41	4.17	3.60	3.56	3.16	1.93	1.18	0.87	0.48	0.27	0.24	0.35	0.68	0.94	0.96	0.94	
-160	4.48	4.49	4.40	4.21	4.17	3.92	2.76	1.64	1.15	0.83	0.44	0.28	0.24	0.35	0.70	0.93	0.96	0.94	
-150	5.21	5.28	5.34	5.10	4.24	2.99	1.95	1.36	1.04	0.64	0.37	0.26	0.24	0.40	0.73	0.93	0.96	0.94	
-140	5.91	5.32	4.53	3.46	2.49	1.78	1.37	1.05	0.69	0.43	0.28	0.22	0.26	0.51	0.80	0.93	0.96	0.94	
-130	2.68	2.43	2.17	1.86	1.53	1.17	0.81	0.54	0.38	0.27	0.21	0.20	0.38	0.65	0.86	0.94	0.95	0.94	
-120	1.27	1.17	1.04	0.89	0.71	0.53	0.38	0.25	0.23	0.22	0.28	0.42	0.60	0.79	0.90	0.94	0.95	0.94	
-110	0.44	0.41	0.38	0.34	0.31	0.29	0.29	0.32	0.39	0.49	0.61	0.72	0.81	0.89	0.93	0.95	0.95	0.94	
-100	0.54	0.53	0.52	0.52	0.55	0.61	0.67	0.74	0.81	0.85	0.88	0.90	0.92	0.94	0.95	0.95	0.95	0.94	
-90	0.92	0.91	0.90	0.88	0.89	0.92	0.95	0.97	1.00	0.99	0.99	0.98	0.97	0.97	0.96	0.95	0.95	0.94	
-80	1.32	1.30	1.27	1.24	1.22	1.22	1.21	1.21	1.19	1.15	1.11	1.07	1.03	1.00	0.98	0.96	0.95	0.94	
-70	1.52	1.49	1.47	1.44	1.40	1.36	1.31	1.28	1.25	1.20	1.16	1.11	1.06	1.03	0.99	0.97	0.95	0.94	
-60	1.54	1.51	1.47	1.44	1.42	1.38	1.33	1.27	1.18	1.11	1.07	1.07	1.05	1.01	1.00	0.97	0.95	0.94	
-50	1.86	1.78	1.70	1.63	1.57	1.52	1.47	1.38	1.25	1.11	1.01	0.94	0.97	0.98	0.97	0.97	0.95	0.94	
-40	2.91	2.57	2.26	2.02	1.83	1.69	1.56	1.44	1.32	1.18	1.03	0.94	0.92	0.93	0.93	0.96	0.96	0.94	
-30	25.5	18.4	11.2	5.70	3.01	2.21	1.81	1.56	1.37	1.20	1.16	1.06	0.96	0.89	0.90	0.94	0.95	0.94	
-20	96.7	90.1	74.2	46.1	16.6	4.98	2.56	1.87	1.63	1.48	1.36	1.22	1.04	0.90	0.87	0.91	0.94	0.94	
-10	102	87.1	73.5	61.1	39.6	14.2	4.42	2.80	2.19	1.84	1.58	1.37	1.13	0.92	0.85	0.89	0.94	0.94	
0	1155	180	68.3	41.9	28.7	14.8	5.88	3.60	2.69	2.16	1.79	1.49	1.20	0.94	0.82	0.87	0.93	0.94	
10	3648	1289	384	88.5	26.3	13.7	6.91	4.20	2.94	2.25	1.81	1.49	1.19	0.93	0.81	0.85	0.93	0.94	
20	986	657	313	127	47.2	14.3	6.07	3.90	2.78	2.15	1.73	1.42	1.14	0.89	0.78	0.85	0.94	0.94	
30	208	162	87.6	33.2	11.8	5.99	3.88	2.83	2.27	1.91	1.58	1.30	1.04	0.82	0.76	0.86	0.94	0.94	
40	9.80	8.35	6.59	4.90	3.70	2.83	2.27	1.96	1.74	1.54	1.34	1.13	0.90	0.75	0.74	0.89	0.95	0.94	
50	2.78	2.68	2.54	2.32	2.06	1.82	1.60	1.46	1.34	1.21	1.06	0.90	0.74	0.70	0.77	0.91	0.95	0.94	
60	1.64	1.63	1.60	1.55	1.44	1.32	1.20	1.06	0.96	0.86	0.75	0.65	0.64	0.69	0.86	0.94	0.95	0.94	
70	1.00	1.00	1.00	0.98	0.91	0.83	0.74	0.64	0.56	0.57	0.59	0.62	0.73	0.87	0.94	0.97	0.96	0.94	
80	0.51	0.51	0.51	0.52	0.52	0.54	0.57	0.61	0.68	0.75	0.83	0.91	0.96	0.99	0.99	0.98	0.96	0.94	
90	0.93	0.92	0.91	0.90	0.90	0.92	0.94	0.96	0.98	1.00	1.01	1.02	1.03	1.03	1.01	0.98	0.96	0.94	
100	0.76	0.78	0.80	0.83	0.83	0.81	0.79	0.79	0.79	0.81	0.84	0.88	0.92	0.97	0.99	0.99	0.97	0.94	
110	0.13	0.16	0.19	0.23	0.23	0.22	0.23	0.24	0.26	0.32	0.38	0.46	0.55	0.73	0.89	0.96	0.97	0.94	
120	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.03	0.03	0.05	0.10	0.17	0.27	0.55	0.76	0.92	0.97	0.94	
130	0.12	0.09	0.07	0.07	0.07	0.06	0.06	0.04	0.02	0.01	0.01	0.05	0.18	0.43	0.70	0.88	0.96	0.94	
140	0.37	0.30	0.22	0.19	0.16	0.14	0.11	0.05	0.03	0.01	0.00	0.03	0.14	0.36	0.66	0.86	0.96	0.94	
150	2.19	1.97	1.69	1.30	0.81	0.43	0.22	0.11	0.04	0.00	0.03	0.07	0.13	0.32	0.63	0.86	0.96	0.94	
160	3.67	3.52	3.38	3.09	2.60	1.83	0.89	0.30	0.22	0.18	0.11	0.12	0.15	0.31	0.63	0.88	0.96	0.94	
170	4.26	4.20	4.04	3.84	3.51	3.02	2.19	1.12	0.64	0.49	0.27	0.18	0.19	0.32	0.64	0.92	0.96	0.94	
180	3.89	4.38	4.25	3.82	3.18	3.31	3.00	1.83	1.07	0.80	0.42	0.24	0.24	0.36	0.69	0.96	0.96	0.94	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:30DEG
 Operators:Simon
 Test Date:2019-08-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.510m [K=1.0000]
 Remarks: